

Built to take it!

MIDLAND®

Model 75-822


Micro 40 Channel Hand Held With Mobile Adapter And Weather/All-Hazard

This ultra-miniature portable CB has all the features and power you need. The model 75-822 is lightweight and can be converted from a hand held radio to mobile radio with vehicle adapter.

- Easily convertible to a mobile radio with included 18-821 vehicle adapter and external antenna (not included)
- Built-in 10-channel weather monitor puts local weather and hazard (fire, earthquake, radiation leak, toxic chemical spills, etc.) information at your fingertips; receives all Canadian weather channels. Weather and/or hazard service not available in some areas
 - Large, lighted LCD readout displays 18 functions/modes including channel numeral or frequency
 - Instant access to five users-selectable memory channels emergency channel 9 and road information channel 19
- Keyboard locks prevents accidental activation of other function/mode keys
- Dual watch monitors two user-selectable channels and memory channel scan monitors most-used channels
- High/low power settings and auto power save mode prolong battery life
- Removable battery case holds six "AA" batteries (batteries not included)
- Jacks for microphone and external speaker (both sold separately)
 - Includes low-profile flexible antenna with BNC mount, belt clip, carry strap battery case, user's manual and 18-821 vehicle adapter.

Specifications:

- Size: 5" H x 2 3/4" W x 1 1/4" D
- Weight: 13.8 ounces (with battery pack)
- Power supply: 6 "AA" Alkaline (battery pack included, batteries not included) or 8 "AA" NiCad batteries (battery pack and batteries not included), 12V DC, adapter included
- Receiver sensitivity: 0.7 μ V for 10 dB S/N
- Tx distortion: Less than 5%
- Selectivity: 50 dB
- Modulation: 90% (\pm 5%)
- RF power: 7 watts input, 4 watts output

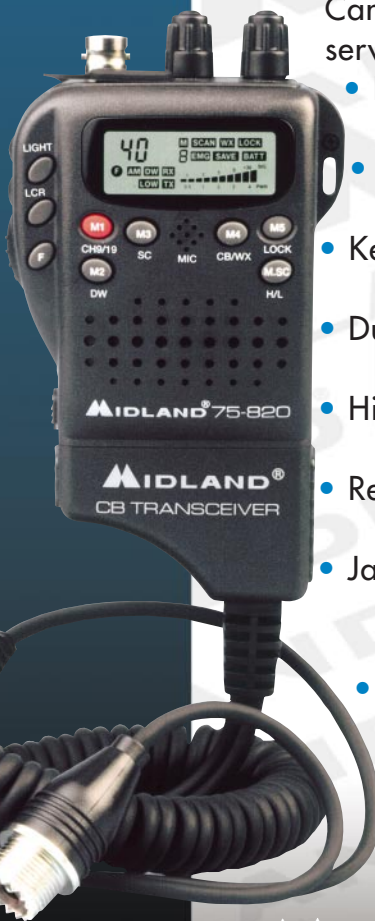

MIDLAND®
CONSUMER RADIO

1670 N. Topping Ave., Kansas City, MO 64120
Phone (816) 241-8500 Fax (816) 241-5713

E-mail: midlndcb@tfs.net

www.midlandradio.com